

Solar Bluetooth Keyboard

Manual/取扱説明書/使用说明书

Bluetooth

Solar Bluetooth Keyboard

太阳能蓝牙键盘

GSKBBT066-SUN
GSKBBT066W-SUN

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

1. Opening
Thank you for purchasing the Bluetooth Keyboard.
2. Precautions
 - This product is powered by electricity, if there is smoke or a strange smell, please turn off the power of this product and the connected computer or other equipment, and contact your dealer or our company.
 - Do not allow liquids, metals, or other foreign objects inside the product.
 - ▲ It may cause electric shock, fire or malfunction.
 - Do not subject this product to strong vibration or impact.
 - ▲ It may cause malfunction or damage.
 - Loss of data and programs that may occur while using this product are not under warranty.
 - ▲ Please take measures to protect data such as backing up data on a periodic basis.
 - When cleaning the product, do not use volatile organic solvents such as benzene or thinner.
 - ▲ To avoid damage to the surface or malfunction, wipe with a slightly damp cloth.
3. Warnings Regarding Health
Operating the mouse, trackball, and keyboard for long periods of time can lead to pain or numbness in hands, arms, neck, shoulders, etc. Serious damage may be incurred if such use is repeated. If you feel pain or numbness while operating the mouse, trackball and keyboard, stop use immediately and consult a doctor if necessary. Take regular breaks from daily computer work to avoid strain on hands, arms, neck, shoulders, etc.

4. Specifications

Key switch	Pantograph	Key stroke	2.0±0.3mm
Key display	English	Actuation force	50~80g
Key number/pitch	110 Keys-19mm	Transmission distance	8m
Compliance standard	Bluetooth Ver.5.1		
Battery life	Approx.320 hours		
Charging time	Approx.4 hours		
Charging port	Type-C		
Power supply	NiMH battery		
B a t t e r y	NiMH battery 600mAh/2.4V		
Power consumption	2mA or less		
Size	W438×D155×H20mm - approx.737g		
Accessories	USB cable for charging, Instruction manual		

 - ※ This product cannot implement special key functions of the laptop keyboard or the manufacturer's keyboard (such as adjusting screen brightness or adjusting volume, etc.).
 - ※ Commands before Windows starts (BIOS settings, SCSI board settings, etc.) may not be available.
5. Compatible Models
Windows PC and tablets with built-in Bluetooth module, macOS Mac series, Android smartphones and tablets, iOS iPhone series, iPad series
6. Compatible Systems
Windows 7/8/10, macOS 10.12 or above, Android 7.0 or above, iPad OS 13.4 or above, iOS 13.0 or above

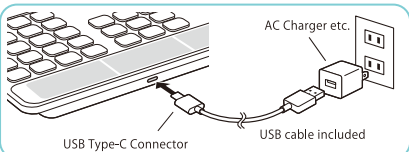7. Method of Charging

Power LED (red light)
Normal charging time: approx. 4 hours
※ Light off when finished.

Charging port




- 1.はじめに
この度は、Bluetoothキーボードをお買い上げいただき、誠にありがとうございます。
- 2.注意
 - 本製品は電気で作動しておりますので、発火する恐れがあります。万一煙が出たり変な臭いがした場合は、本製品及び接続しているパソコンや機器の電源を切り、お買い上げの販売店又は、弊社までご連絡ください。
 - 本製品内部に液体、金属などの異物が入らないようにしてください。
 - ▲ 感電や火災、故障の原因となることがあります。
 - 本製品に強い振動や衝撃を与えないでください。
 - ▲ 故障・破損などの原因となることがあります。
 - 本製品を使用中に発生したデータやプログラムの消失についての保証はいたしかねます。
 - ▲ 定期的にバックアップを取るなどの対策をあらかじめ行ってください。
 - 本製品のお手入れをする場合には、ベンジンやシンナーなどの揮発性有機溶剤が含まれているものは使用しないでください。
 - ▲ 表面を傷めたり、故障の原因になることがあります。固くしぼった布などで水拭きしてください。
- 3.健康に関する注意
マウスやトラックボール、キーボードを長時間操作すると、手や腕や首、肩などに負担が掛かり痛みや痺れを感じることがあります。マウスやキーボードを操作中に身体に痛みや痺れを感じたら、直ちに操作を中止し、場合によっては医師に相談してください。また日常のパソコン操作では定期的に休憩を取り、手や腕や首、肩など身体に負担が掛からないように心がけてください。

- 4.仕様

キースイッチ	パンタグラフ	キーストローク	2.0±0.3mm
キー表示	US	動作力	50~80g
キー数・キーピッチ	110キー・19mm	通信距離	8m
適合規格	Bluetooth Ver.5.1		
連続動作時間	約320時間		
充電時間	約4時間		
充電口	Type-C		
給電方法	ニッケル・水素充電電池		
使用電池	ニッケル・水素充電電池 600mAh/2.4V		
消費電流	2mA以下		
サイズ・重量	W438×D155×H20mm・約737g		
付属品	充電用USBケーブル、取扱説明書		

 - ※ ノートパソコンや各メーカー純正キーボードのファンクションキーにあらかじめ割り付けられている特殊機能（画面の明度調整やボリュームのアップダウンなど）は、このキーボードからは操作できません。
 - ※ Windowsが起動する前のコマンド（BIOSの設定、SCSIボードの設定など）は使用できない場合があります。
- 5.対応機種
Bluetoothモジュール内蔵のWindows搭載パソコン、タブレット、macOS搭載Macシリーズ、Android搭載スマートフォン、タブレット、iOS搭載iPhoneシリーズ、iPadシリーズ
- 6.対応OS
Windows 7/8/10, macOS 10.12以上, Android 7.0以上, iPad OS 13.4以上, iOS 13.0以上

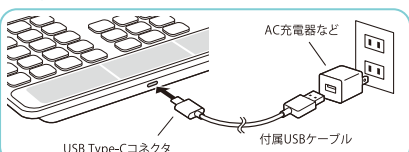- 7.充電方法

電源LED(赤色に点灯)
通常充電時間:約4時間
※消灯で充電完了

充電ポート




- 1.致礼
尊敬的客户，感谢您选购我司商品，在此致以最诚挚的谢意。
- 2.使用须知
 - 本商品使用电源供电，若出现冒烟或感觉到异味时，请立即切断本产品及已连接的电脑或其他设备的电源，并与所购买的门店或我司联系。
 - 请避免液体、金属等异物进入产品内部。
 - ▲ 有可能造成触电、火灾、故障。
 - 请勿剧烈摇晃或撞击本产品。
 - ▲ 有可能造成故障、破损。
 - 本产品使用时产生的数据或程序丢失，恕我司概不负责。
 - 请采取定期备份等措施以防丢失。
 - 清洁本品时，请勿使用含有苯精或稀释剂等挥发性有机溶剂的清洁用品。
 - ▲ 有可能损坏表面、造成故障。请用拧干水分的抹布轻轻擦拭。
- 3.健康须知
长时间使用鼠标、轨迹球以及键盘会对手臂、头部和颈部等增加负担进而产生疼痛或麻木。长此以往可能给身体造成严重损伤。倘若您使用鼠标和键盘过程中感觉到疼痛或麻木，请立刻停止使用，并根据自身情况咨询医生。此外，请您注意日常使用电脑时要多休息多活动，不要给身体增加过多负担。

- 4.规格参数

按键	独立架式	键程	2.0±0.3mm
键位表示	英语	输入力	50~80g
键数・键距	110键・19mm	传输范围	8m
蓝牙规格	Bluetooth Ver.5.1		
连续使用时间	约 320 小时		
充电时间	约 4 小时		
充电口	Type-C		
供电方式	镍氢电池		
使用电池	镍氢电池 600mAh/2.4V		
消耗电流	2mA 以下		
尺寸・重量	W438×D155×H20mm・约 737g		
附属品	USB 充电线、说明书		

 - ※ 无法通过本产品实现笔记本电脑键盘或原装键盘的特殊自定义按键功能（例如调整屏幕亮度或调节音量等）
 - ※ 在 Windows 启动之前，可能会出现命令（BIOS 设置、SCSI 板设置等）不可用的情况。
- 5.适用设备
搭载 Bluetooth 蓝牙模块的 Windows 电脑、平板电脑、macOS Mac 系列、Android 智能手机、平板电脑、iOS iPhone 系列、iPad 系列
- 6.对应OS
Windows 7/8/10, macOS 10.12以上, Android 7.0以上, iPad OS 13.4以上, iOS 13.0以上

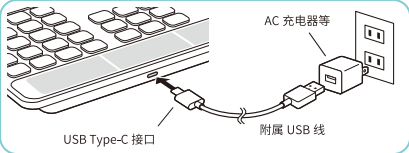
- 7.充电方法

电源 LED (亮红灯)
正常充电时间: 约 4 小时
※充电结束后灭灯

充电端口



8. Main buttons and LED display

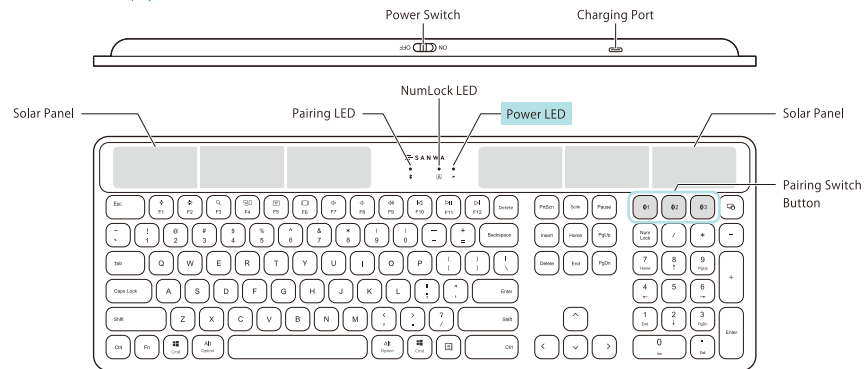

Power LED

- Switch ON: Green LED lights up for 3 seconds
- In use: Light off
- In use (when the battery is low): Green LED flashes every 5 seconds
- Charging: Red light
- Full charge: Red light off

10. Warranty Term

1 year

11. Inquiries

EN : support-en@sanwa.com


9. Pairing Operation

- ① Turn on the Bluetooth function on the PC, tablet or smartphone.
- ② Turn on the power switch of this product.
- ③ Press one of 「1(①)」 or 「2(②)」 or 「3(③)」 to select the number to assign the device until the pairing LED flashes green.
- ④ Select「SANWA BT KEYBOARD」as it is displayed on the Bluetooth setting screen of the connected device.
- ⑤ Pairing is complete and the pairing LED lights off

※When you need to switch between multiple devices, just press the corresponding pairing switch button to switch easily.

SANWA

8. 主なボタンとLED表示

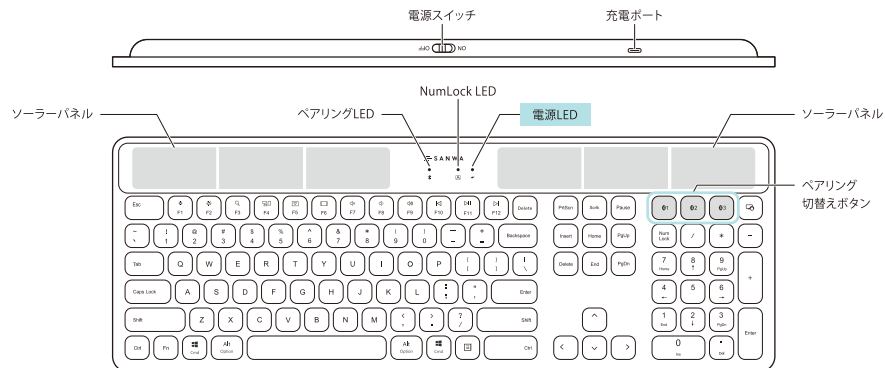

電源LED

- スイッチON時：緑色LEDが3秒点灯
- 使用中：消灯
- 使用中（電池残量が減った時）：緑色LEDが5秒ごとに点滅
- 充電中：赤色LEDが点灯
- 満充電：赤色LEDが消灯

10. 保証期間

1 年

11. お問い合わせ


JP : mailsupport@sanwa.co.jp

9. ペアリング方法

- ① パソコン・タブレット・スマートフォンの「Bluetooth」機能を「オン」にしてください。
 - ② 本製品の電源スイッチをONにします。
 - ③ 「1(①)」 「2(②)」 「3(③)」のいずれかをペアリングランプが緑色に点滅するまで長押しして、機器を割り付ける番号を選択します。
 - ④ 接続機器のBluetooth設定画面に「SANWA BT KEYBOARD」と表示されるので選択してください。
 - ⑤ ペアリングが完了し、ペアリングランプが消灯します。
- ※機器を複数台登録して、使用機器を切替える場合は該当のペアリング切替えボタンを押すだけで簡単に切替えます。

SANWA

8. 主要按键和 LED 显示

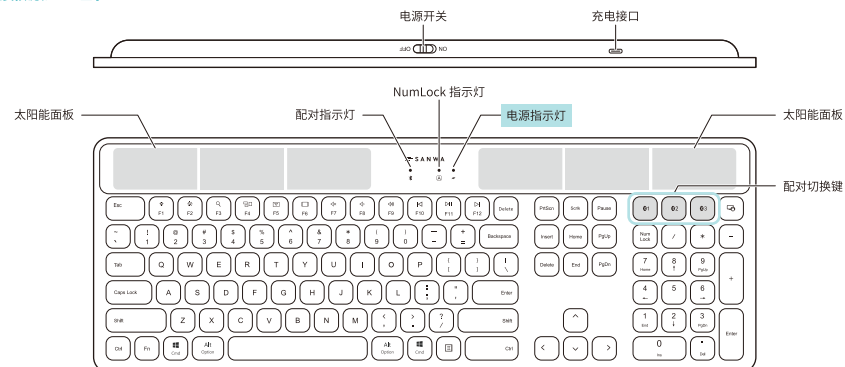

电源指示灯

- 开关 ON: 绿色 LED 亮 3 秒
- 使用中: 灭灯
- 使用中（电量不足时）: 绿色 LED 每 5 秒闪烁一次
- 充电中: 红色 LED 亮灯
- 满电时: 红色 LED 灯灭

10. 保修期

1 年

11. 产品咨询

CN : support-cn@sanwa.com

9. 配对方法

- ① 打开电脑・平板・手机上的「蓝牙」功能。
- ② 打开本产品的电源开关。
- ③ 「1(①)」 或 「2(②)」 或 「3(③)」 中任选其一长按后选择设备对应配对编号，直到配对指示灯闪烁绿灯。
- ④ 在连接设备的蓝牙设置界面选择「SANWA BT KEYBOARD」。
- ⑤ 完成配对，配对指示灯灭灯。

※登录多台设备需要切换使用时，只需按下相应的配对切换键即可轻松切换。

SANWA